
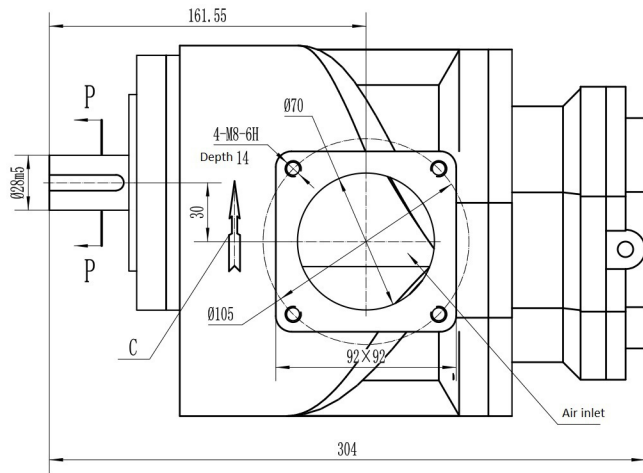

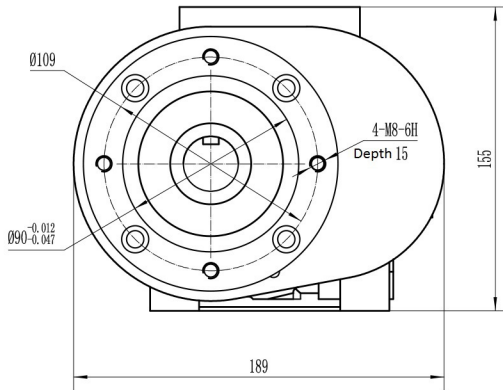
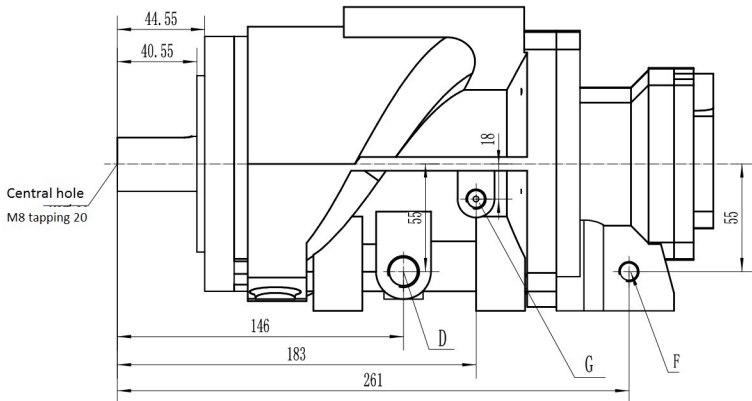
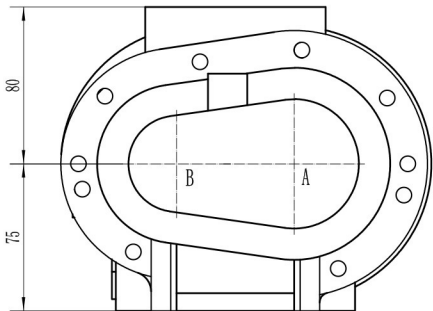


轴功率 (KW)	排压 (Mpa)	0.8
	转速 (rpm)	2950
8.25KW	气量 (m3/min)	1.01

Импортер: ООО «Рутектор»
Адрес: 109456, Россия, Москва,
1-й Вешняковский проезд, д.1
(строение 11)
+7 495 660-0069 info@rutector.ru
rutector.ru

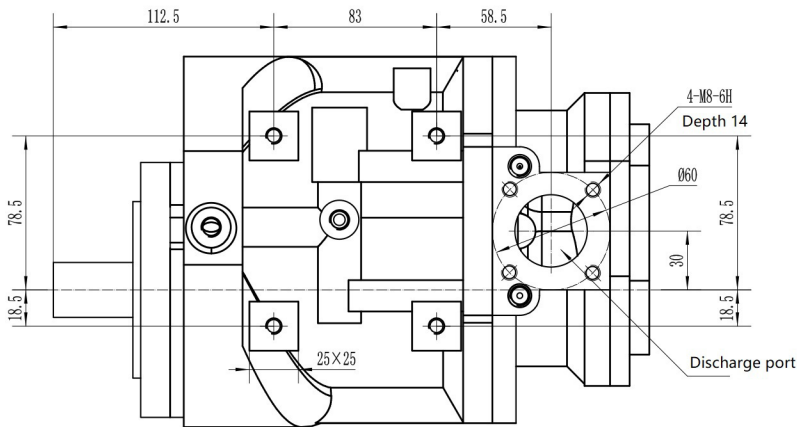

- A – Male rotor
- B – Female rotor
- C – Rotational direction
- G – Droplet from separator M10*1
- D – Oil inlet M16*1.5
- F – Temperature measurement point for air discharge M10*1

						Ningbo Baosi Energy Equioment Co.. Ltd.		
						YNT60A		
标记	处数	分区	更改文件号	签名	年、月、日	阶段标记	重量	比例
设计			20120627	标准化				1:3.5
审核								
工艺				批准		共 A/0 张	第 张	